




PANORAMA

BANCO pozzetti con riserva / 2 level built-in pozzetti COUNTER



CARATTERISTICHE TECNICHE	TECHNICAL SPECIFICATIONS	OPTIONAL	OPTIONALS
- vasca monoblocco schiumata in poliuretano iniettato a 40 kg/m³ - interno vasca in acciaio inox 18/10 AISI 304 - piletta di scarico vasca con tappo di chiusura per facilitare le operazioni di sbrinamento e di pulizia - 2 livelli di carapine H 250 mm - sistema anti-rotazione delle carapine - chiusura ermetica con ante in vetro pirolitico, temperato e riscaldato - illuminazione LED - refrigerazione ventilata - pannello comandi elettronico - sbrinamento manuale con arresto dell'impianto	- carapine con sistema anti-rotazione - lavaporizzatore - motore remoto	- monobloc foam tank insulated with injected polyurethane (40 kg/m³) - tank interior in 18/10 AISI 304 stainless steel - tank drains with plug to facilitate defrosting and cleaning operations - double level of 250 mm / 9.84" high gelato tubs - exclusive tubs anti-rotation system - tempered and heated airtight glass closure system - LED lighting - ventilated refrigeration system - electronic control panel - manual defrost function with system stoppage	- tubs with anti-rotation system - scoop washer - remote condensing unit

SEZIONE SECTION VIEW

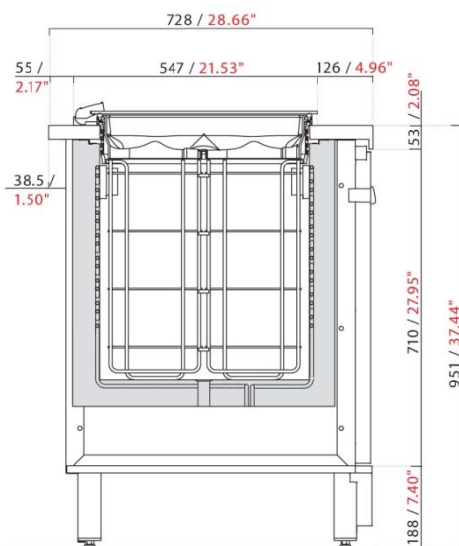

BANCO PANORAMA CON RISERVA

PANORAMA pozzetti counter with 2 levels of gelato tubs

DIMENSIONI, PESO E IMBALLO DIMENSIONS, WEIGHT AND PACKAGING


MODELLO MODEL	LUNGHEZZA con 2 fianchi LENGTH with 2 end panels		PROFONDITÀ DEPTH		PESO WEIGHT		DIMENSIONE IMBALLO PACKAGING DIMENSIONS		PESO con imballo CRATED WEIGHT	
	mm	in	mm	in	kg	lb	mm	in	kg	lb
L 750	810	31.89"	728	28.66"	45	100	1124x911xH1367	44.3"x35.9"xH53.8"	82	181
L 1000	1060	41.73"	728	28.66"	60	132	1124x911xH1367	44.3"x35.9"xH53.8"	97	214
L 1250	1310	51.57"	728	28.66"	75	165	1624x911xH1367	63.9"x35.9"xH53.8"	126	278
L 1500	1560	61.42"	728	28.66"	90	198	1624x911xH1367	63.9"x35.9"xH53.8"	141	311
L 1750	1810	71.26"	728	28.66"	105	231	2124x911xH1367	83.6"x35.9"xH53.8"	169	373
L 2000	2060	81.10"	728	28.66"	120	265	2124x911xH1367	83.6"x35.9"xH53.8"	184	406
L 2250	2310	90.94"	728	28.66"	135	298	2624x911xH1367	103.3"x35.9"xH53.8"	213	470
L 2500	2560	100.79"	728	28.66"	150	331	2624x911xH1367	103.3"x35.9"xH53.8"	228	503
L 3000	3060	120.47"	728	28.66"	180	397	3124x911xH1367	123"x35.9"xH53.8"	272	600
L 3500	3560	140.16"	728	28.66"	210	463	3724x1074xH1367	146.6"x42.3"xH53.8"	336	741
L 4000	4060	159.84"	728	28.66"	240	529	4224x1074xH1367	166.3"x42.3"xH53.8"	382	842

1 TEMPERATURA 1 TEMPERATURE

MODULI UC = con motore a bordo UC units = with built-in air-cooled condensing unit




MODULI NUC = con motore remoto NUC units = with remote condensing unit




2 TEMPERATURE 2 TEMPERATURES

MODULI UC = con motore a bordo UC units = with built-in air-cooled condensing unit




MODULI NUC = con motore remoto NUC units = with remote condensing unit

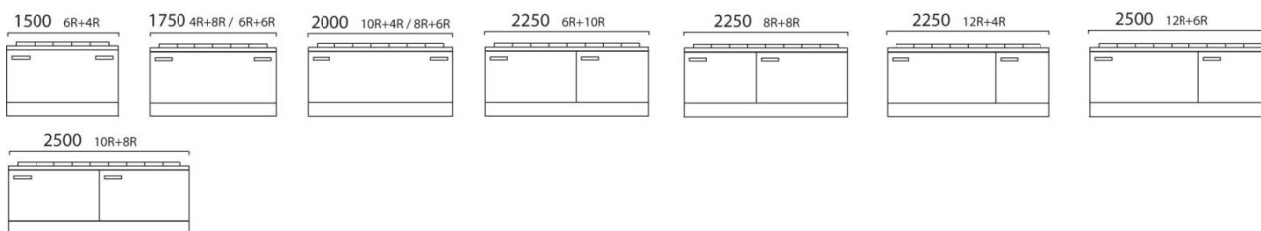


3 TEMPERATURE 3 TEMPERATURES

MODULI UC = con motore a bordo UC units = with built-in air-cooled condensing unit



MODULI NUC = con motore remoto NUC units = with remote condensing unit

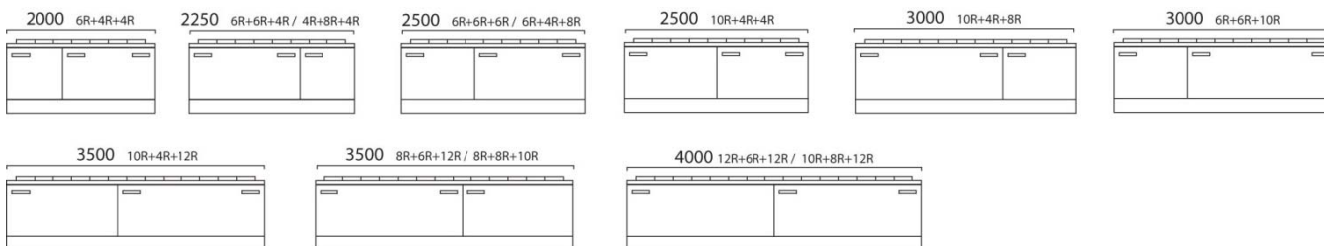

3065103  ETL* - NSF 7 - UL STD 471 - CAN/CSA C22.2 STD n. 120			UC = con motore a bordo UC = with built-in air-cooled condensing unit NUC = con motore remoto entro 10 metri NUC = with condensing unit within 20 meters				TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY				
							V/Ph/Hz 208-220/1/60				
MODELLO MODEL	POTENZA COMP. HP	BREAKER SIZE	MCA	MOP	RESA CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
1 TEMPERATURA 1 TEMPERATURE	HP	A	A	A	W/h -30°C	BTU/h -22°F	°C	°F	U.R. R.H.	°C	°F
4 pozzetti	1/2	8	7	10	460	1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
6 pozzetti	1/2	8	7	10	460	1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
8 pozzetti	5/8	8	6	8	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
10 pozzetti	5/8	8	6	9	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
12 pozzetti	5/8	8	6	9	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F

3065103  ETL* - NSF 7 - UL STD 471 US - CAN/CSA C22.2 STD n. 120 Intertek Intertek			UC = con motore a bordo UC = with built-in air-cooled condensing unit NUC = con motore remoto entro 10 metri NUC = with condensing unit within 20 meters				TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY V/Ph/Hz 208-220/1/60					
MODELLO MODEL	POTENZA COMP. HP	BREAKER SIZE	MCA	MOP	RESA CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE		
2 TEMPERATURE 2 TEMPERATURES	HP	A	A	A	W/h -30°C	BTU/h -22°F	°C	°F	U.R. R.H.	°C	°F	
6+4 pozzetti	5/8	8	6	9	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
6+6 pozzetti	5/8	8	6	9	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
4+8 pozzetti	5/8	8	6	9	502	1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
4+10 pozzetti	1,2	10	8	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
6+8 pozzetti	1,2	10	8	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
6+10 pozzetti	1,2	10	9	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
8+8 pozzetti	1,2	10	9	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
10+4 pozzetti	1,2	10	8	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
10+8 pozzetti	1,2	10	9	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
12+4 pozzetti	1,2	10	9	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	
12+6 pozzetti	1,2	10	9	12	925	3.154	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F	

3065103 			UC = con motore a bordo UC = with built-in air-cooled condensing unit NUC = con motore remoto entro 10 metri NUC = with condensing unit within 20 meters				TENSIONE E FREQUENZA VOLTAGE AND FREQUENCY V/Ph/Hz 208-220/1/60				
MODELLO MODEL	POTENZA COMP. HP	BREAKER R SIZE	MCA	MOP	RESA CAPACITY		CLASSE CLIMATICA CLIMATE CLASS			TEMPERATURA DI ESERCIZIO OPERATING TEMPERATURE	
3 TEMPERATURE 3 TEMPERATURES	HP	A	A	A	W/h -30°C	BTU/h -22°F	°C	°F	U.R. R.H.	°C	°F
*6+4+4 pozzetti	5/8+1/2	8+8	6+7	9+10	502+460	1.712+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*4+8+4 pozzetti	5/8+1/2	8+8	6+7	9+10	502+460	1.712+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*6+6+4 pozzetti	5/8+1/2	8+8	6+7	9+10	502+460	1.712+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*6+6+6 pozzetti	5/8+1/2	8+8	6+7	9+10	502+460	1.712+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*6+4+8 pozzetti	5/8+5/8	8+8	6+6	9+8	502+502	1.712+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*4+10+4 pozzetti	1,2+1/2	10+8	8+7	12+10	925+460	3.154+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*10+4+4 pozzetti	1,2+1/2	10+8	8+7	12+10	925+460	3.154+1.569	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*10+4+8 pozzetti	1,2+5/8	10+8	8+6	12+8	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*6+4+12 pozzetti	5/8+5/8	8+8	6+6	9+9	502+502	1.712+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*6+6+10 pozzetti	5/8+5/8	8+8	6+6	9+9	502+502	1.712+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*8+4+10 pozzetti	1,2+5/8	8+8	6+6	9+8	502+502	1.712+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*8+6+8 pozzetti	1,2+5/8	10+8	8+6	12+8	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*10+4+12 pozzetti	1,2+5/8	10+8	8+6	12+9	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*8+6+12 pozzetti	1,2+5/8	10+8	9+6	12+9	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*8+8+10 pozzetti	1,2+5/8	10+8	9+6	12+9	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*12+6+12 pozzetti	1,2+5/8	10+8	9+6	12+9	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F
*10+8+12 pozzetti	1,2+5/8	10+8	9+6	12+9	925+502	3.154+1.712	30°C	86°F	55%	-2°C; -18°C	+28.4°F; -0.4°F

*2 compressori / 2 allacci elettrici *2 condensing units / 2 electrical connections