





SPECIFICATIONS

- One-group espresso machine, semi-automatic model manual lever operated, with 1 to 2 cup simultaneous delivery capability.
- The generously sized cup warmer is removable for easy access to the extractable water tank that has a capacity of 3 litres (0,8 US gal).
- Nickel-plated copper boiler.
- Automatic water refill of boiler.
- Heat-balancing units with pre-infusion for optimal espresso extraction.
- Stainless steam jet and hot water spout.
- Ideal for any size operation of espresso bar, hotel, restaurant or cafe featuring advanced technology and ultra modern design for today's market.


City of Los Angeles. Approved.
City of New York. Approved

REALE


Limited Edition

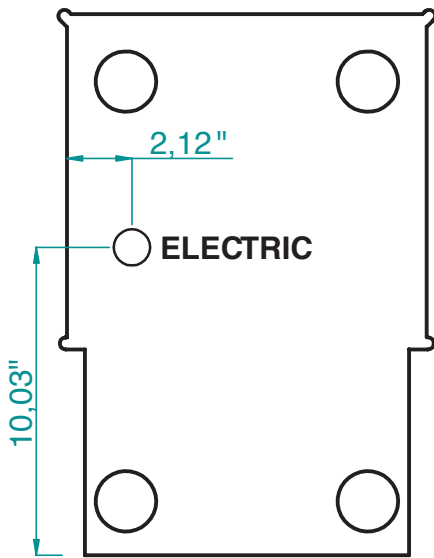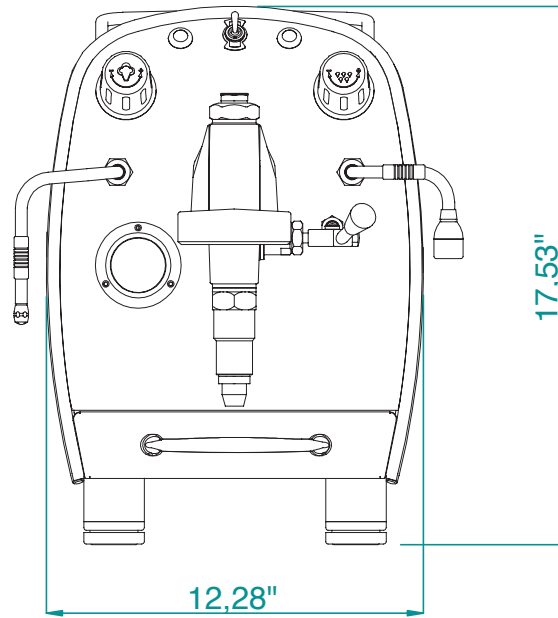

FRONT
(BOTTOM VIEW)

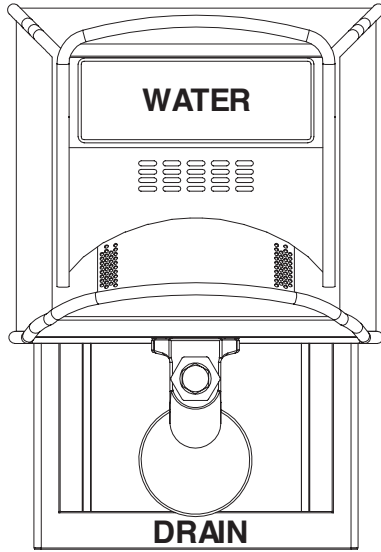

FRONT
(ABOVE VIEW)

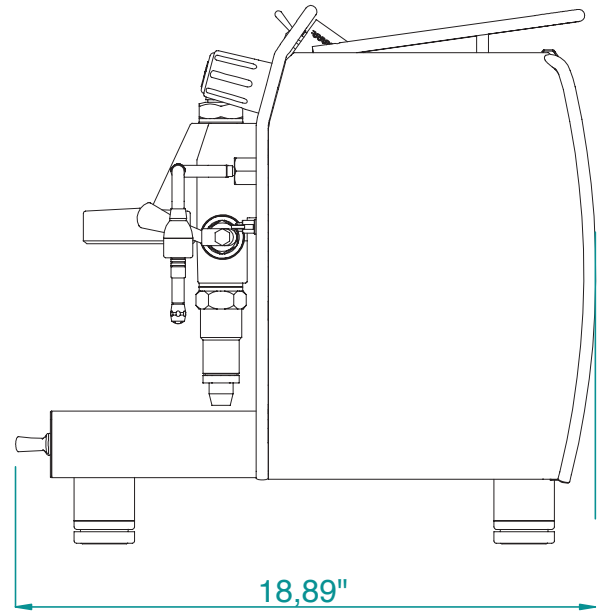

BREW DEVICE	CUPS PER GROUP	W / D / H	BOILER CAP (LITERS)	V.	AMP.	PH.	Hz.	WATTS	WT. (Kg/lbs)	INCOMING H2O	DRAIN	MIN/MAX bar
		W / D / H -HIGH FOOT-							SHIP. WT. (Kg/lbs)			
1	2	12,28" 18,89" 16,41"	1,3	110	12	1	60	1315	22/48	//		2 / 5
		12,28" 18,89" 17,53"							26/57			