



SPECIFICATIONS

- Four-group fully automatic electronic espresso machine with 1 to 8 cup simultaneous delivery capability.
- Available also with deep trip tray, little grid sliding and little spout to accommodate cups from 3,15" to 5,90".
- Coffee delivery independently controlled by a microprocessor system that allows user to program dosage level.
- Thermal heat exchanger per group guarantees a perfect cup of coffee blend or working condition.
- Ideal for any size operation of espresso bar, hotel, restaurant or cafe featuring advanced technology and ultra modern design for today's market.






City of Los Angeles. Approved.
 City of New York. Approved



3157939

GALILEO

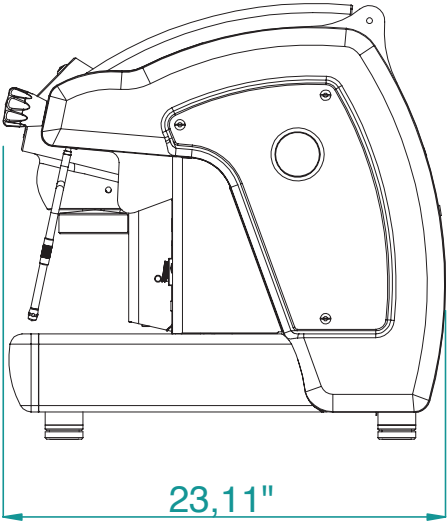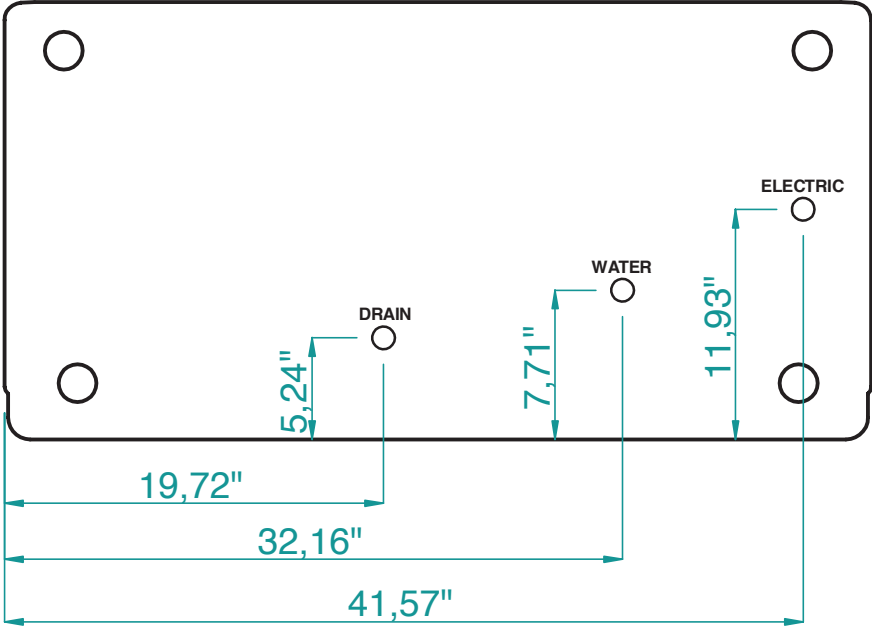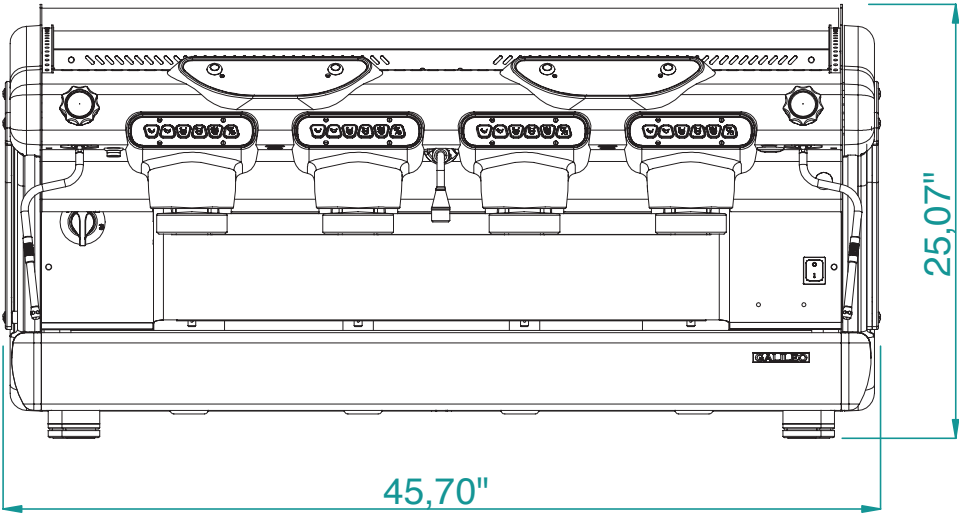

FRONT (BOTTOM VIEW)

BREW DEVICE	CUPS PER GROUP	W / D / H	BOILER CAP (LITERS)	V.	AMP.	PH.	Hz.	WATTS	WT. (kg/lbs)	INCOMING H2O	DRAIN	MIN/MAX bar
		W / D / H -HIGH FOOT-							SHIP. WT. (kg/lbs)			
4	8	45,70" 23,11" 22,72"	27	220	24	1	60	5300	100/220	3/8" MALE	Ø9mm INTERNAL	2 / 5
		45,70" 23,11" 25,07"							106/233			